




BOBBY JINDAL
GOVERNOR

STATE OF LOUISIANA
DEPARTMENT OF TRANSPORTATION AND DEVELOPMENT
P.O. Box 94245
Baton Rouge, Louisiana 70804-9245
www.dotd.la.gov
225-379-1485



WILLIAM D. ANKNER, Ph.D.
SECRETARY

May 18, 2009

STATE PROJECT NO. 007-03-0056
US 61 BARRIER SYSTEM (LA 50 to LA 48)
ROUTE US 61
ST. CHARLES PARISH

SUBJECT: ADDENDUM NO. 2 (CONSTRUCTION PROPOSAL REVISION)

Gentlemen:

The following proposal revisions dated 05/18/09 on the captioned project for which bids will be received on Wednesday, May 27, 2009 have been posted on <http://www.dotd.la.gov/cgi-bin/construction.asp>.

1. Revised the special provision entitled **NS GUARDRAIL BARRIER MARKERS** (1 page).
2. Plan Revision No. 3. (2 pages).

Please note these revisions in the proposal and bid accordingly. Mandatory electronic bidding is required for this project, and electronic bids and electronic bid bonds must be submitted via www.bidx.com for this letting date.

Sincerely,

RANDAL D. SANDERS, P. E.
CONTRACTS & SPECIFICATIONS ENGINEER

Attachments

cc: Mr. Brian Buckel
Mr. Michael Stack
Mr. Michael Duplantis
Ms. Anna Hanks
Mr. Chris G. Morvant
Mr. Masood Rasoulia

NS GUARDRAIL BARRIER MARKERS (04/09): This item consists of furnishing and installing guardrail barrier markers in accordance with these specifications, as detailed in plans and as directed by the Project Engineer.

MATERIALS: The marker shall be constructed of a UV-stabilized, high-impact thermo plastic alloy. The markers shall be of the type fastened to the guard rail post using galvanized nails, screws, or bolts. The materials used to fasten the reflectors shall be as specified by the manufacturer. The markers shall have reflective sheeting with a minimum area of 15 square inches. The reflective sheeting shall be Type III High Intensity conforming to Sections 729 and 1015 of the *Louisiana Standard Specifications for Roads and Bridges* and be an approved product listed on QPL 13.

CONSTRUCTION REQUIREMENTS: The contractor shall comply with manufacture’s installation procedures, plan details, specifications herein, and referenced Sections of the *Louisiana Standard Specifications for Roads and Bridges*.



MEASUREMENT: Measurement will be made by the unit, per each.

PAYMENT: Payment for Guardrail Barrier Markers, including all materials, tools, equipment, labor and incidentals necessary to complete the work will be made at the contract unit price, per each.
Payment will be made under:


<u>Item No.</u>	<u>Pay Item</u>	<u>Pay Unit</u>
NS-729-00002	Guardrail Barrier Marker	Each

STANDARD DESCRIPTION	PLANS REVISION DATE
EC-01	10-1-08
GR-200	1-26-09
GR-202	1-26-09

STATE PROJECT NO. 007-03-0056
US 61 BARRIER SYSTEM (LA 50 TO LA 48)
US 61
ST. CHARLES

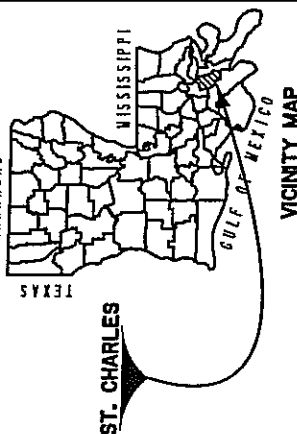

STATION 360+09.60
C.S. LOG MILE 8.50
END. S.P. 007-03-0056

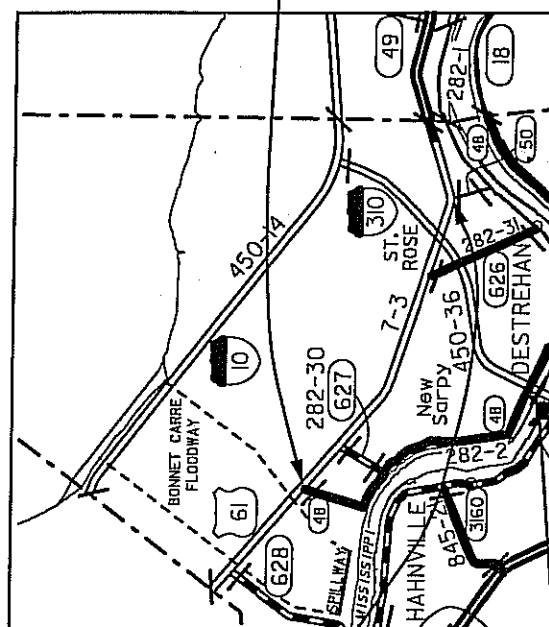

STATION 0+00.00
C.S. LOG MILE 1.68
BEG. S.P. 007-03-0056

TRAFFIC DATA

TYPE OF CONSTRUCTION:
INSTALLATION OF GUARDRAIL AND
ASPHALT STRIP, AND RELATED WORK

RECOMMENDED FOR APPROVAL

L. Bruford 3/13/09
ASSISTANT DISTRICT 02 ADMINISTRATOR-ENGINEERING

DISTRICT 02 ADMINISTRATOR

3/13/09

1-3-09

CHIEF ENGINEER

NOTE:
THE 2006 LOUISIANA DOTD STANDARD SPECIFICATIONS FOR ROADS AND BRIDGES, AS AMENDED BY THE PROJECT SPECIFICATIONS, SHALL GOVERN ON THIS PROJECT.

NO.	DATE	REVISION DESCRIPTION	DATE	BY	CHK
3	5-18-09	Shts 1 & 2b	5-18-09	MAZ	RM
2	5-4-09	Shts 1, 2a, 3, 4-4a, & 5c	5-4-09	MAZ	RM
1	4-21-09	General Revision (All sheets)	4-21-09	MAZ	RM


SCHEDULE OF REVISIONS

US-61 BARRIER SYSTEM
(LA-50 TO LA-48)




DISTRICT 02
DESIGN


DESIGNED	JMS	PARISH	ST CHARLES
CHECKED	MJS	FEDERAL PROJECT	
DATE	3/13/09	STATE PROJECT	007-03-0056
BY	SHEET		
REVISION DESCRIPTION			



GUARDRAIL BARRIER MARKER

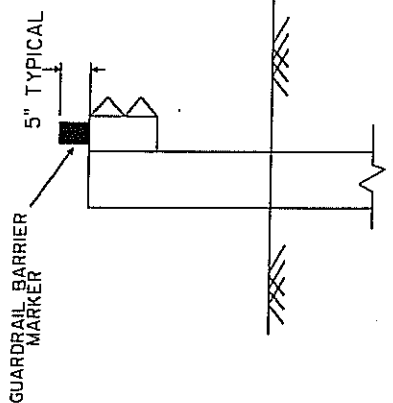

GUARDRAIL BARRIER MARKER
ATTACHED TO WOODBLOCK
W/ WOOD POST

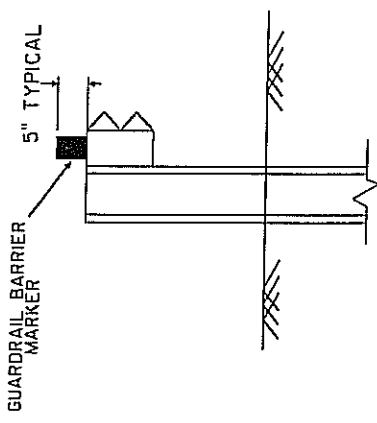

GUARDRAIL BARRIER MARKER
ATTACHED TO WOODBLOCK
W/ STEEL POST

NOTES:

- ③ 1. GUARDRAIL BARRIER MARKERS SHALL BE AS SPECIFIED IN THIS DETAIL AND IN THE SPECIFICATIONS.
2. ALL GUARDRAIL BARRIER MARKERS INSTALLED ON THE PROJECT SHALL BE OF THE SAME MODEL AND MANUFACTURE.
3. ALL GUARDRAIL BARRIER MARKERS SHALL BE APPROVED BY THE PROJECT ENGINEER PRIOR TO INSTALLATION.
4. GUARDRAIL BARRIER MARKERS SHALL BE INSTALLED ON ALL GUARDRAIL THROUGHOUT THE LIMITS OF THE JOB. THE MARKERS SHALL BE PLACED AT 25' INTERVALS AS DIRECTED BY THE PROJECT ENGINEER.
5. REFLECTIVE SHEETING SHALL BE PLACED ON ONE SIDE FACING ONCOMING TRAFFIC. THE REFLECTIVE SHEETING SHALL BE COLORLESS WHITE TYPE III HIGH INTENSITY.
6. FASTENERS SHALL BE AS SPECIFIED BY THE MANUFACTURER AND SHALL BE GALVANIZED NAILS, SCREWS OR BOLTS. MARKERS USING A GLUE APPLICATION SHALL NOT BE USED ON THE PROJECT.
7. PAYMENT FOR GUARDRAIL BARRIER MARKERS SHALL BE INCLUDED IN NON STANDARD ITEM "GUARDRAIL BARRIER MARKER".

		US-61 BARRIER SYSTEM (LA-50 TO LA-48)			
DISTRICT 02 DESIGN		GUARDRAIL BARRIER MARKER DETAIL		NO. DATE REVISION DESCRIPTION	
③ 5-18-09		REVISED NOTE		JAG JAG JAG JAG JAG JAG	
DESIGNED JAG		CHECKED JAG		PARISH ST CHARLES	
DETAILED JAG		CHECKED JAG		FEDERAL PROJECT	
DATE 4/15/09		BY SHEET		STATE PROJECT	
SHEET NO.		2b		007-03-0056	