



BOBBY JINDAL
GOVERNOR

STATE OF LOUISIANA
DEPARTMENT OF TRANSPORTATION AND DEVELOPMENT

P.O. Box 94245
Baton Rouge, Louisiana 70804-9245

www.dotd.la.gov
225-379-1485



WILLIAM D. ANKNER, Ph.D.
SECRETARY

February 16, 2009

STATE PROJECT NO. 019-02-0051
FEDERAL AID PROJECT NO. 1705(513)
I-110 (AVOCET ST) - LA 964
ROUTE US 61
EAST BATON ROUGE PARISH

SUBJECT: ADDENDUM NO. 1 (CONSTRUCTION PROPOSAL REVISION)
ELECTRONIC BIDDING AMENDMENT NO. 1

Gentlemen:

The following proposal revisions dated 02/16/09 on the captioned project for which bids will be received on Wednesday, February 25, 2009 have been posted on <http://www.dotd.la.gov/cgi-bin/construction.asp>.

1. Plan revision No. 4. (6 sheets)
2. Revised the Schedule of Items as follows: (1 page)
 - a) Revised the quantity of Item 502-01.

Please note these revisions in the proposal and bid accordingly. Mandatory electronic bidding is required for this project, and electronic bids and electronic bid bonds must be submitted via www.bidx.com for this letting date.

Sincerely,

RANDAL D. SANDERS, P. E.
CONTRACTS & SPECIFICATIONS ENGINEER


Attachments

cc: Mr. Brian Buckel
Mr. Roy Schmidt
Mr. Phil Graves
Ms. Anna Hanks
Mr. Jay McCain
Mr. Ronnie Robinson
Ms. Margaret Thompson
Mr. Masood Rasoulia

STANDARD PLANS TO BE USED

- BM-01 8-22-07
- DO-01(M) 2-4-97
- EC-01 10-1-08
- FN-03 6-01-83
- GR-200 11-08-04
- PEB-01 5-5-08
- HS-03 1-03-05
- MB-01 1-14-92
- MC-01 8-11-2006
- PM-01 1-21-98

BRIDGE LISTING		
C.S.L.M.	STR. NO.	DIMENSIONS
4.32	090204321	28' W X 162' L
4.32	090204322	28' W X 162' L



TRAFFIC DATA

2007 A.D.T. = 27,800
 2017 A.D.T. = 36,100
 D=55% K=10% T=16%


TYPE CONSTRUCTION: COLD PLANING, RUBBLIZATION, SUPERPAVE ASPHALTIC CONCRETE OVERLAY, GUARD RAIL

DATE	REVISION	DATE	RECOMMENDED	DATE	APPROVED
11/23/09	Shts 1, 40, 47, 48, 49 & 49a	2-7-05	MSAL	3-9-09	WKS
1/13/09	General revision; all sheets	1/23/09	MSAL	7-22-09	RLB
7/8/08	Shts 1, 2, 8, 41-43, 47-49, and 49a	7-23-08	MSAL	7-23-08	RLB
12/19/07	General revision; all sheets	6-25-08	MSAL	6-25-08	RLB

THE 2006 LOUISIANA D.O.T.D. STANDARD SPECIFICATIONS FOR ROADS AND BRIDGES AS AMENDED BY THE PROJECT SPECIFICATIONS SHALL GOVERN ON THIS PROJECT.

STATE OF LOUISIANA
 DEPARTMENT OF TRANSPORTATION & DEVELOPMENT
 PLANS OF PROPOSED
STATE HIGHWAY

FEDERAL AID PROJECT NO. 1705(513)
 STATE PROJECT NO. 019-02-0051
 I-110 (AVOCET ST) - LA 964
 EAST BATON ROUGE PARISH
 US 61

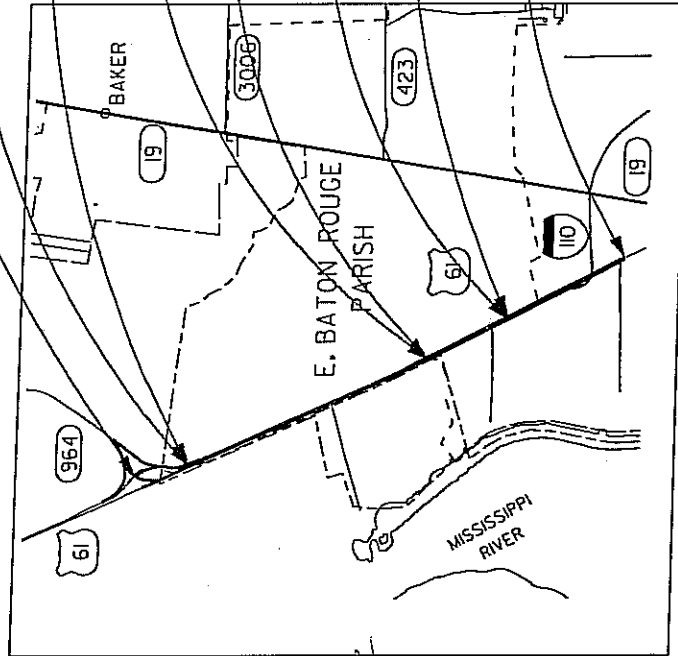

C.S.L.M. 4.550
 STATION 306+59.60
 (S. END LA 964 OVERPASS)
 END S.P. 019-02-0051

EXCEPTION: 1052.4' (ROADWAY & BRIDGE)
 STATION 294+45.20 (SB) TO
 STATION 306+59.60 (SB)

PAVING EXCEPTION: 162.0' (BRIDGE)
 STATION 294+45.20 (NB) TO
 STATION 296+07.20 (NB)

EXCEPTION: 10' (RR KING)
 STATION 199+52.75 (SB) TO
 STATION 199+62.75 (SB)

EXCEPTION: 10' (RR KING)
 STATION 198+83.75 (NB) TO
 STATION 198+93.75 (NB)

EXCEPTION: 10' (RR KING)
 STATION 168+04.75 (SB) TO
 STATION 168+14.75 (SB)

EXCEPTION: 10' (RR KING)
 STATION 167+77.75 (NB) TO
 STATION 167+87.75 (NB)

C.S.L.M. 0.667
 STATION 101+56.75
 (AVOCET STREET)
 BEGIN S.P. 019-02-0051

RECOMMENDED FOR APPROVAL

DISTRICT DESIGN, WATER RESOURCES & DEVELOPMENT ENGINEER

DISTRICT ADMINISTRATOR

APPROVED

for CHIEF ENGINEER

DATE 10-1-07

2 7/8/08 Revised sheet total AH

SURFACING QUANTITIES SUMMARY

SHEET 1 OF 2

STATE PROJECT	PARISH	SHEET
019-02-0051	EBR	40

ITEM 202-02-C REMOVAL OF PORTLAND CEMENT CONCRETE PAVEMENT
TRAVEL LANES AT REQD PROFILE ADJUSTMENTS

ITEM 202-02-G REMOVAL OF SURFACING AND STABILIZED BASE
REMOVE EXISTING SHOULDERS AT REQD PROFILE ADJUSTMENTS & TURN LANES
REMOVE EXISTING SHOULDERS AT REQD GUARD RAIL PAVING

ITEM 202-02-J REMOVAL OF STABILIZED BASE (6" THICK)
TRAVEL LANE BASE AT REQD PROFILE ADJUSTMENTS

ITEM 203-01 GENERAL EXCAVATION
EXCAVATION FOR PROFILE ADJUSTMENT

ITEM 302-02-B CLASS II BASE COURSE (6" THICK)
6" THICK SHOULDER BASE AT REQD PROFILE ADJUSTMENTS & TURN LANE
6" THICK BASE AT REQD GUARD RAIL PAVING

ITEM 302-02-G CLASS II BASE COURSE (20" THICK)
TRAVEL LANE BASE AT REQD PROFILE ADJUSTMENTS, ACCEL LANE, & RT TURN LANE

ITEM 502-01 SUPERPAVE ASPHALTIC CONCRETE

TRAVEL LANES 6" AVG THICKNESS BINDER
TRAVEL, ACCEL, & RT TURN LANES 4" THICK BINDER
SHOULDERS 10" AVG THICK WEARING
SHOULDERS 8" THICK SHLDR COURSE
SHOULDERS 6" THICK SHLDR COURSE
SHOULDERS 2" THICK SHLDR COURSE

ITEM 502-01-A SUPERPAVE ASPHALTIC CONCRETE, DRIVES, TURNOUTS AND MISCELLANEOUS
CROSSOVERS 4" THICK BINDER COURSE
DRIVEWAYS & TURNOUTS
REQUIRED GUARD RAIL PAVING
ADDITIONAL 10% FOR LEVELING

ITEM 509-01-A COLD PLANING ASPHALTIC PAVEMENT (2" AVG DEPTH)
COLD PLANING SHOULDERS

ITEM TOTAL ==> 4800 SQ YDS
4800 SQ YDS

= 3517.2 SQ YDS
= 937.9 SQ YDS
ITEM TOTAL ==> 4455.1 SQ YDS

= 4800 SQ YDS
= 4800 SQ YDS
ITEM TOTAL ==>

= 1343 CU YDS
= 1343 CU YDS
ITEM TOTAL ==>

= 3072.4 SQ YDS
= 4318.0 SQ YDS
ITEM TOTAL ==> 7390.4 SQ YDS

= 5830.4 SQ YDS
= 5830.4 SQ YDS
ITEM TOTAL ==>

110	lbs / sq yd / inch depth X	9600.0	sq yards X	6.00	inch deep /	2000	lbs / ton =	3168.0 TONS
110	lbs / sq yd / inch depth X	75005.3	sq yards X	4.00	inch deep /	2000	lbs / ton =	16501.2 TONS
110	lbs / sq yd / inch depth X	84605.3	sq yards X	2.00	inch deep /	2000	lbs / ton =	9306.6 TONS
110	lbs / sq yd / inch depth X	5599.8	sq yards X	10.00	inch deep /	2000	lbs / ton =	3079.9 TONS
110	lbs / sq yd / inch depth X	20267.7	sq yards X	8.00	inch deep /	2000	lbs / ton =	8917.8 TONS
110	lbs / sq yd / inch depth X	20216.6	sq yards X	6.00	inch deep /	2000	lbs / ton =	6871.5 TONS
110	lbs / sq yd / inch depth X	16941.2	sq yards X	2.00	inch deep /	2000	lbs / ton =	1863.5 TONS
ITEM TOTAL ==>								49508.5 TONS

110	lbs / sq yd / inch depth X	8125.6	sq yards X	4.00	inch deep /	2000	lbs / ton =	1787.6 TONS
110	lbs / sq yd / inch depth X	8125.6	sq yards X	2.00	inch deep /	2000	lbs / ton =	893.8 TONS
ITEM TOTAL ==>								1102.5 TONS
ITEM TOTAL ==>								791.7 TONS
ITEM TOTAL ==>								457.6 TONS
ITEM TOTAL ==>								5033.2 TONS

ITEM TOTAL ==> 39587 SQ YDS

1/23/2009	CHANGED QUANTITY	HJB
DATE	REVISION	BY

F. A. P. NO.		STATE PROJECT		PARISH		SHEET NO.
NH-1705(513)		019-02-0051		E BATON ROUGE		
SUMMARY OF ESTIMATED QUANTITIES						
ITEM NO.	ITEM	UNIT	QUANTITY S.P. NO. 019-02-0051	TOTAL QUANTITY		
202-02-C	REMOVAL OF PORTLAND CEMENT CONCRETE PAVEMENT	SOYD	4,800			
202-02-D	REMOVAL OF CONCRETE WALKS AND DRIVES	SOYD	1,145			
202-02-E	REMOVAL OF CONCRETE CURBS	LNFT	384.0			
202-02-G	REMOVAL OF SURFACING & STABILIZED BASE	SOYD	4,455.1			
202-02-H	REMOVAL OF GUARD RAIL	LNFT	101			
202-02-I	REMOVAL OF STABILIZED BASE (6" THICK)	SOYD	4,800.0			
202-02-J	REMOVAL OF CONCRETE HEADWALLS AND WINGWALLS	EACH	7			
202-02-K	REMOVAL OF CATCH BASINS	EACH	2			
202-02-L	REMOVAL OF SIDE DRAIN PIPE (24" RCP)	LNFT	56			
203-01	GENERAL EXCAVATION	CUYD	1,343			
203-02	DRAINAGE EXCAVATION	CUYD	400			
203-07	BORROW (VEHICULAR MEASUREMENT)	CUYD	4,243			
204-02	TEMPORARY HAY OR STRAW BALES	EACH	343			
204-06	TEMPORARY SILT FENCING	LNFT	43,162			
302-02-B	CLASS II BASE COURSE (6" THICK)	SOYD	7,390.4			
302-02-G	CLASS II BASE COURSE (20" THICK)	SOYD	5,830.4			
303-02	REMOVAL OF EXISTING PATCHES	SOYD	200.0			
402-01	TRAFFIC MAINTENANCE AGGREGATE (VEHICULAR MEASUREMENT)	CUYD	800.0			
502-01	SUPERPAVE ASPHALTIC CONCRETE	TON	49,508.5			
502-01-A	SUPERPAVE ASPHALTIC CONCRETE, DRIVES, TURNOUTS AND MISCELLANEOUS	TON	5,033.2			
509-01-A	COLD PLANING ASPHALTIC PAVEMENT (2" AVG DEPTH)	SOYD	39,587			
509-01-B	COLD PLANING ASPHALTIC PAVEMENT (4" AVG DEPTH)	SOYD	45,063			
509-01-C	COLD PLANING ASPHALTIC PAVEMENT (6" AVG DEPTH)	SOYD	4,797			
509-01-D	COLD PLANING ASPHALTIC PAVEMENT (7" AVG DEPTH)	SOYD	7,516			
509-02	CONTRACTOR RETAINED RECLAIMED ASPHALTIC PAVEMENT	CUYD	-7,101			
510-01-A	PAVEMENT PATCHING (6" MINIMUM THICKNESS)	SOYD	1,300			
602-02-A	CLEANING AND RESEALING EXISTING LONGITUDINAL PAVEMENT JOINTS	LNFT	16,767			
602-02-B	CLEANING AND RESEALING EXISTING TRANSVERSE PAVEMENT JOINTS	LNFT	17,569			
602-03	CLEANING AND SEALING RANDOM CRACKS	LNFT	2,060			
602-05-K-01	FULL DEPTH PATCHING OF JOINTED CONC PVMT (10" THICK) (16.0 SQ YDS & UNDER)	SOYD	80.0			
602-05-K-02	FULL DEPTH PATCHING OF JOINTED CONC PVMT (10" THICK) (16.1-48.0 SQ YDS)	SOYD	85.0			

12/19/07 GENERAL REVISION

- 1 12/19/07 GENERAL REVISION
- 2 07/08/08 ADD AND REVISE ITEMS
- 3 01/13/09 REVISED QUANTITIES
- 4 01/23/09 GENERAL REVISION

F. A. P. NO.
NH-1705(513)

STATE PROJECT
019-02-0051

PARISH
E BATON ROUGE

SHEET NO.
48

SUMMARY OF ESTIMATED QUANTITIES

ITEM NO.	ITEM	UNIT	QUANTITY S.P. NO. 019-02-0051	TOTAL QUANTITY
602-05-K-03	FULL DEPTH PATCHING OF JOINTED CONC PVMT (10" THICK) (48.1 SQ YDS & OVER)	SQYD	330.0	
602-10	LONGITUDINAL SHOULDER JOINTS			
701-05-K	SIDE DRAIN PIPE (30")	LNFT	20.570	
701-10-G	REINFORCED CONCRETE PIPE (EXTENSION) (18")	LNFT	56	
701-15	CONCRETE COLLAR	LNFT	8	
702-04-B	ADJUSTING CATCH BASINS	EACH	2	
702-07-A	CROSS DRAIN SAFETY END (TYPE 1)	EACH	6	
702-07-B	CROSS DRAIN SAFETY END (TYPE 2)	EACH	1	
702-08-A	SIDE DRAIN SAFETY END (TYPE 1)	EACH	2	
702-08-B	SIDE DRAIN SAFETY END (TYPE 2)	EACH	13	
703-01	SHOULDER UNDERDRAIN SYSTEMS	EACH	3	
703-02	SHOULDER OUTLET UNDERDRAINS	LNFT	26.770	
704-01-C	GUARD RAIL (DOUBLE THREE BEAM) (3'-1 1/2" POST SPACING)	EACH	106	
704-03	BLOCKED OUT GUARD RAIL	LNFT	481.5	
704-06-A	GUARD RAIL ANCHOR SECTIONS (TRAILING END) (SINGLE THREE BEAM)	LNFT	562.8	
704-11-B	GUARD RAIL END TREATMENT (TANGENT)	LNFT	4.0	
704-11-C	GUARD RAIL END TREATMENT (BI-DIRECTIONAL)	EACH	4	
706-01-A	CONCRETE WALK (4" THICK)	EACH	4	
707-01-A	CONCRETE CURB (MOUNTABLE)	SQYD	1.145.4	
707-01-B	CONCRETE CURB (6" BARRIER)	LNFT	1.384.0	
713-01	TEMPORARY SIGNS & BARRICADES	LNFT	1.000.0	
713-02-C	TEMPORARY PAVEMENT MARKINGS (8" WIDTH)	LUMP		
713-02-E	TEMPORARY PAVEMENT MARKINGS (24" WIDTH)	LNFT	6.802	
713-03-A	TEMPORARY PAVEMENT MARKINGS (BROKEN LINE) (4" WIDTH) (4' LENGTH)	LNFT	864	
713-03-B	TEMPORARY PAVEMENT MARKINGS (BROKEN LINE) (4" WIDTH) (10' LENGTH)	MILE	25.436	
713-04-A	TEMPORARY PAVEMENT MARKINGS (SOLID LINE) (4" WIDTH)	MILE	25.436	
713-05-A	TEMPORARY PAVEMENT MARKINGS (ARROW)	MILE	45.467	
713-05-C	TEMPORARY PAVEMENT LEGENDS AND SYMBOLS (ONLY)	EACH	88	
713-05-D	TEMPORARY PAVEMENT LEGENDS AND SYMBOLS (RR CROSSING)	EACH	44	
722-02	PROJECT SITE LABORATORY (EQUIPPED)	EACH	16	
726-01	BEDDING MATERIAL	EACH	1	
727-01	MOBILIZATION	CUYD	84.7	
		LUMP		

12/19/07 GENERAL REVISION
01/13/09 REVISED QUANTITIES
01/23/09 General Revision

DATED 02/09/09 09:43:32

F. A. P. NO.		STATE PROJECT	PARISH	SHEET NO.
NH-1705(513)		019-02-0051	E BATON ROUGE	49
SUMMARY OF ESTIMATED QUANTITIES				
ITEM NO.	ITEM	UNIT	QUANTITY S.P. NO. 019-02-0051	TOTAL QUANTITY
729-16-B	OBJECT MARKER ASSEMBLY (Type 2)	EACH	10	
729-16-C	OBJECT MARKER ASSEMBLY (Type 3)	EACH	9	
731-02	REFLECTORIZED RAISED PAVEMENT MARKERS	EACH		
732-01-C	PLASTIC PAVEMENT STRIPING (8" WIDTH)	EACH	1,395	
732-01-E	PLASTIC PAVEMENT STRIPING (24" WIDTH)	LNFT	2,267	
732-02-A	PLASTIC PAVEMENT STRIPING (SOLID LINE) (4" WIDTH)	LNFT	288	
732-03-A	PLASTIC PAVEMENT STRIPING (BROKEN LINE) (4" WIDTH)	MILE	15.156	
732-04-A	PLASTIC PAVEMENT LEGENDS & SYMBOLS (ARROW)	MILE	8.524	
732-04-C	PLASTIC PAVEMENT LEGENDS & SYMBOLS (ONLY)	EACH	44	
732-04-D	PLASTIC PAVEMENT LEGENDS & SYMBOLS (RR CROSSING)	EACH	22	
732-05	REMOVAL OF EXISTING MARKINGS	EACH	8	
734-01	RUBBLIZING PORTLAND CEMENT CONCRETE PAVEMENT	MILE	3.206	
735-01	MAILBOXES	SOYD	57,552	
735-02	MAILBOX SUPPORTS (SINGLE)	EACH	22	
736-01	TRENCHING AND BACKFILLING	EACH	22	
736-02	CONDUIT WITH CONDUCTORS (1" PEC SCHEDULE 80, W/2 - #14 AWG CONDUCTORS)	LNFT	55	
736-09	LOOP DETECTOR	LNFT	145	
736-10	UNDERGROUND JUNCTION BOX	LNFT	263	
736-12-A	CONDUCTOR, 2C (LOOP LEAD-IN, #14 AWG)	EACH	2	
739-01	HYDRO-SEEDING	LNFT	335	
740-01	CONSTRUCTION LAYOUT	ACRE	5.95	
S-001	RUMBLE STRIPS (GROUND-IN)	LUMP		
S-002	DYNAMIC MESSAGE SIGN UNIT	MILE	13.2	
S-003	CLEANING EXISTING DITCHES	EACH	4	
S-004	SAW CUTTING OF PORTLAND CEMENT CONCRETE PAVEMENT (10" DEEP)	LNFT	2,000	
S-005	CLEANING CONCRETE CURB	LNFT	5,544	
S-006	FORESLOPE REPAIR	LNFT	4,000	
S-007	PAVEMENT & BASE REPAIR AT RUBBLIZED PAVEMENT (20" THICK)	SOYD	878.9	
		SOYD	150.0	

12/19/07 GENERAL REVISION

1 12/19/07 GENERAL REVISION
2 07/08/08 ADD AND REVISE ITEMS
3 01/13/09 REVISED QUANTITIES
4 01/23/09 General Revision

DATED 02/09/09 09:43:32

F. A. P. NO.
NH-1705(513)

STATE PROJECT
019-02-0051

PARISH
E BATON ROUGE

SHEET NO.
498

SUMMARY OF ESTIMATED QUANTITIES

ITEM NO.	ITEM	UNIT	QUANTITY S.P. NO. 019-02-0051	TOTAL QUANTITY
S-008	RAP TREATED INTERLAYER (4" THICK)	SQYD	45,936	
S-009	ASPHALT EMULSION FOR RAP TREATED INTERLAYER	GAL	55,123	
S-010	LIME FOR RAP TREATED INTERLAYER	CWT	1,515.9	
S-011	SAW CUTTING ASPHALTIC CONCRETE PATCHES (6" DEEP)	LNFT	5,280	

12/19/07 GENERAL REVISION
07/08/08 ADD AND REVISE ITEMS
01/13/09 REVISED QUANTITIES
01/23/09 General Revision

LOUISIANA DEPARTMENT OF TRANSPORTATION AND DEVELOPMENT
SCHEDULE OF ITEMS

LEAD PROJECT: 019-02-0051
OTHER PROJECTS:

DATE: 02/09/09 09:43 PAGE: 4

ITEM NUMBER	APPROXIMATE QUANTITY	UNIT OF MEASURE	PAY ITEM UNIT PRICE (IN WORDS, INK OR TYPED)
502-01	49,508.5	TON	SUPERPAVE ASPHALTIC CONCRETE DOLLARS CENTS
502-01-A	5,033.2	TON	SUPERPAVE ASPHALTIC CONCRETE, DRIVES, TURNOUTS AND MISCELLANEOUS DOLLARS CENTS
509-01-A	39,587	SQUARE YARD	COLD PLANING ASPHALTIC PAVEMENT (2" AVG DEPTH) DOLLARS CENTS
509-01-B	45,063	SQUARE YARD	COLD PLANING ASPHALTIC PAVEMENT (4" AVG DEPTH) DOLLARS CENTS
509-01-C	4,797	SQUARE YARD	COLD PLANING ASPHALTIC PAVEMENT (6" AVG DEPTH) DOLLARS CENTS
509-01-D	7,516	SQUARE YARD	COLD PLANING ASPHALTIC PAVEMENT (7" AVG DEPTH) DOLLARS CENTS

M-4