




BOBBY JINDAL
GOVERNOR

STATE OF LOUISIANA
DEPARTMENT OF TRANSPORTATION AND DEVELOPMENT
P.O. Box 94245
Baton Rouge, Louisiana 70804-9245
www.dotd.la.gov
225-379-1485



WILLIAM D. ANKNER, Ph.D.
SECRETARY

July 14, 2009

STATE PROJECT NOS. 026-03-0042 and 026-04-0029
FEDERAL AID PROJECT NO. 1508(500)
US 65 – FOULES (NORTHBOUND)
ROUTE US 425
CONCORDIA and CATAHOULA PARISHES

SUBJECT: ADDENDUM NO. 1 (CONSTRUCTION PROPOSAL REVISION)
ELECTRONIC BIDDING AMENDMENT NO. 1

Gentlemen:

The following proposal revisions dated 07/14/09 on the captioned project for which bids will be received on Wednesday, July 29, 2009 have been posted on <http://www.dotd.la.gov/cgi-bin/construction.asp>.

1. Revised the Estimated Cost Range in the Notice to Contractors. (1page)
2. Added the Special Provision entitled "Traffic Paint Curbs and Traffic Islands". (2 pages)
3. Plan Revision No. 1. (8 pages)
4. Revised the Schedule of Items as follows: (1 page)
 - a. Added item 737-00001.

Please note these revisions in the proposal and bid accordingly. Mandatory electronic bidding is required for this project, and electronic bids and electronic bid bonds must be submitted via www.bidx.com for this letting date.

Sincerely,

RANDAL D. SANDERS, P. E.
CONTRACTS & SPECIFICATIONS ENGINEER

Attachments

cc: Mr. Brian Buckel
Mr. Rick Moon
Mr. Gary Panteria
Ms. Anna Hanks
Mr. Eric Burges
Mr. Masood Rasoulain

NOTICE TO CONTRACTORS (11/08)

Electronic bids and electronic bid bonds for the following project will be downloaded by the Department of Transportation and Development (DOTD) on **Wednesday, July 29, 2009**. **Paper bids and paper bid bonds will not be accepted.** Electronic bids and electronic bid bonds must be submitted through www.bidx.com prior to the electronic bidding deadline. Beginning at 10:00 a.m., all bids will be downloaded and posted online at <http://www.dotd.la.gov/cgi-bin/construction.asp>. No bids are accepted after 10:00 a.m.

DBE GOAL PROJECT

STATE PROJECT NOS. 026-03-0042 and 026-04-0029

FEDERAL AID PROJECT NO. ARR-1508(500)

DESCRIPTION: US 65 – FOULES (NORTHBOUND)

ROUTE: US 425

PARISHES: CONCORDIA and CATAHOULA

LENGTH: 7.137 miles.

TYPE: COLD PLANING ASPHALTIC CONCRETE, ASPHALTIC SURFACE TREATMENT, SUPERPAVE ASPHALTIC CONCRETE OVERLAY, and RELATED WORK.

LIMITS: State Project No. 026-03-0042: LOCATED ON ROUTE US 425 FROM NORTH OF ITS JUNCTION WITH ROUTE US 65 to THE EAST END OF THE TENSAS RIVER BRIDGE.

LIMITS: State Project No. 026-04-0029: LOCATED ON ROUTE US 425 FROM THE WEST END OF THE TENSAS RIVER BRIDGE to 900 FEET NORTH OF ELAM TURNER ROAD.

ESTIMATED COST RANGE: \$1,000,000 to \$2,500,000

PROJECT ENGINEER: PANTERIA, GARY; 2215 E. Wallace Blvd., Ferriday, LA 71334, (318) 757-3832.

PROJECT MANAGER: MASON, KEN.

Bids must be prepared and submitted in accordance with Section 102 of the 2006 Louisiana Standard Specifications for Roads and Bridges as amended by the project specifications, and must include all information required by the proposal.

TRAFFIC PAINT CURBS AND TRAFFIC ISLANDS (06/09):

DESCRIPTION. This work consists of furnishing and applying reflective white or yellow paint for curbs and traffic islands in accordance with plan details, the MUTCD and these specifications.

MATERIALS. Traffic paint shall be either quick dry alkyd or waterbased traffic paint complying with Subsection 1015.12. Glass beads for drop-on or pressurized application shall comply with Subsection 1015.13.

EQUIPMENT. Selection of proper equipment to produce satisfactory results within the following requirements shall be the responsibility of the contractor.

- (a) Equipment shall permit traffic to pass safely within the limits of the roadway surface and shoulder while operating.
- (b) Equipment shall provide a method for cleaning the surface of dust immediately prior to placement of materials.
- (c) The equipment shall provide accurate regulation of the application rate. Paint shall not be spattered or blown outside the prescribed limits during application.

CONSTRUCTION REQUIREMENTS.

- 1) Color of paint (yellow or white) shall be as designated in the plans. Edge lines of the painted area shall be neat, without mist or drip. Paint may be applied by manual or hand methods as approved by the engineer.
- 2) Surface Preparation. Surfaces to be painted shall be cleaned of materials that may reduce adhesion of paint. Surfaces shall be kept clean and dry at the time of application of paint.
- 3) Weather Limitations. No painting shall be done when the surface is not thoroughly dried, when the air is foggy or misty, when the air or surface temperature is below 50°F (10°C), or when wind or other condition causes a film of dust to be deposited on the surface after cleaning and before painting can be done or causes displacement of material.
- 4) Application.

(a) Paint Preparation: Immediately before application, paints shall be agitated and mixed thoroughly to a uniform consistency, free from lumps or agglomerates. Paints shall be kept covered to retain volatiles. Paints shall not be thinned without approval. Paint shall be kept thoroughly mixed throughout the application process.

Paint may be heated in heat exchangers to accelerate drying, to a temperature between 110°F and 130°F (43°C and 54°C) for waterbased paint, and between 120°F and 150°F (49°C and 66°C) of solvent based paint.

(b) Application Rate: Paint shall be applied at the rate of 1.25 gallons per 10 square yards at a thickness of 22 wet mils (560 wet μm) and 15 dry mils (380 dry μm).

The paint must be reflectorized for night visibility by adding glass beads before the paint dries or sets by using drop-on or pressurized methods. Glass beads, complying with Subsection 1015.13, shall be applied at the same time as the paint but in a separate operation at the rate of 10 pounds of beads per gallon of paint (1.2 kg/L).

5) Protection of Markings. The contractor shall use methods to prevent traffic from crossing the wet paint. Paint that has been marred or picked up by traffic before it has dried shall be repaired by the contractor at no direct pay. The pavement shall be cleaned outside the painted area at no direct pay.

The contractor is not required to maintain paint which has been accepted.

6) Protection Of Traffic. The contractor shall furnish and place all necessary temporary warning and directional signs to direct and protect the traveling public during painting operations.

Protective and traffic marking devices shall comply with Section 713.

The contractor shall be responsible for resolving all issues related to paint on private vehicles at no direct pay.

7) Field Testing Of Traffic Paint. The Department will field test the pavement markings in accordance with Subsection 1015.12 at the discretion of the engineer. Failure to meet these requirements will require the contractor to replace the portion of the material shown to be out of specifications as directed by the engineer.

8) Corrective Work: Any painted area found to be defective shall be repainted as directed by the engineer. The corrective work shall also be subject to these requirements. The contractor shall replace the paint at no cost to the Department.

9) Guarantee: The contractor shall provide the Department with a guarantee stating that if the paint fails to comply with the stated performance requirements, the contractor shall take the remedial action required. Replacement paint shall carry the unexpired guarantee of the paint it replaces.

MEASUREMENT. Traffic Paint will be measured by the square yard (sq m) or linear foot (lin m). The quantities of traffic paint for payment will be the design quantities specified in the plans and adjustments thereto. The design quantities will be adjusted if the engineer makes changes to adjust to field conditions, if design errors are proven, or if design changes are necessary.

(a) Square Yard (sq m): Measurement will be by the square yard (sq m), based on horizontal dimensions of the painted area. Quantities will not be adjusted for vertical faces.

(b) Linear Foot (Lin m): Measurement will be by the linear foot (lin m), along design pay lines.

PAYMENT. Payment for traffic paint will be made at the contract unit prices.

Payment will be made under:



Item No.	Pay Item	Pay Unit
NS-737-00001 (Sq m)	Traffic Paint Curbs and Traffic Islands	Square Yard

STANDARD PLANS TO BE
USED ON THIS PROJECT

STD. PLAN	REV. DATE
BM-01	08-22-07
DW-04	09-16-82
EC-01	10-01-08
MB-01	02-18-09
PM-01	01-21-98

STATE OF LOUISIANA
DEPARTMENT OF TRANSPORTATION & DEVELOPMENT
PLANS OF PROPOSED
STATE HIGHWAY

F.A.P. NO. ARR-1508 (500)
S.P. NO. 026-03-0042 & 026-04-0029
US 65 - FOULES (NORTHBOUND)
CONCORDIA & CATAHOULA PARISH
US 425

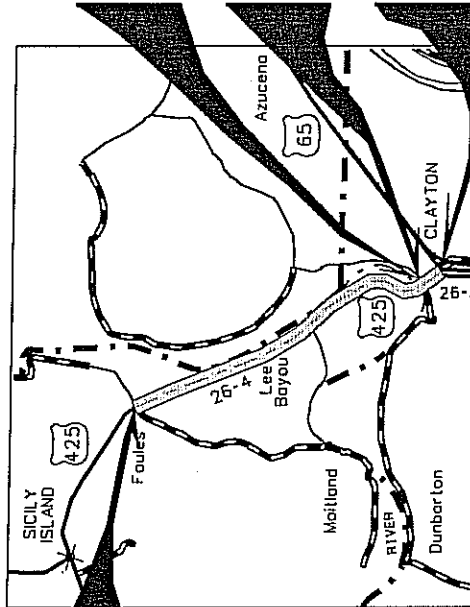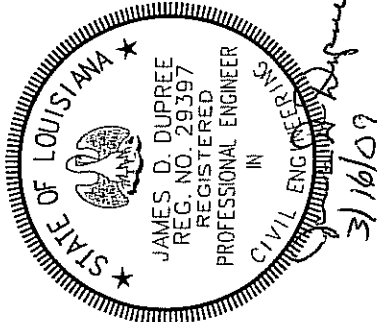

STA. 386+80
C.S. LOG MILE 6.871
END S.P. NO. 026-04-0029

TYPE OF CONSTRUCTION:

Cold Planing, Overlay,
Asphaltic Surface Treatment

TRAFFIC DATA

2009 A.D.T. = 4,100
2019 A.D.T. = 4,800
D = 55%
K = 10%
T = 12%

SCHEDULE OF REVISIONS

DATE	REVISION	DATE	RECOMMENDED	DATE	APPROVED
7-6-09	17-18e	7-8-09	18e	7-13-09	10e

THE 2006 LOUISIANA DOTD STANDARD SPECIFICATIONS
FOR ROADS AND BRIDGES, AS AMENDED BY THE PROJECT
SPECIFICATIONS, SHALL GOVERN ON THIS PROJECT.

RECOMMENDED FOR APPROVAL:

[Signature]
DISTRICT ENGINEER ADMINISTRATOR

DATE 3-16-09

APPROVED:

[Signature]
CHIEF ENGINEER
DATE 4-30-09

SHEET NUMBER 1		PROJECT 026-03-0042 (LEAD)		DATE		BY		REVISION DESCRIPTION		NO.		DATE		TITLE SHEET		CATAHOULA PARISHES		CONCORDIA & 026-04-0029		DISTRICT 58 DESIGN	
PARISH CONCORDIA		FEDERAL PROJECT 1508(500)		CHECKED		CHECKED		CHECKED		CHECKED		CHECKED		CHECKED		CHECKED		CHECKED		CHECKED	



7/8/2009

Summary Of Estimated Quantities

Page: 17

Project ID: 026-03-0042 State Project Number: 026-03-0042
Federal Project Number: 1508(500)
Project Description: US 65 - FOULES (NORTHBOUND)

Item No.	Description	Supplemental Description	Alternate Set Member	Quantity	Units
General Items					
401-02-00100	Aggregate Surface Course (Adjusted Vehicular Measurement)			81.000	CUYD
502-01-00100	Superpave Asphaltic Concrete				
502-01-00200	Superpave Asphaltic Concrete, Drives, Turnouts and Miscellaneous			667.300	TON
				142.100	TON
507-01-00100	Asphaltic Material (CRS-2P Emulsion)				
507-02-00200	Aggregate (S2)			2,475.000	GAL
507-02-00300	Aggregate (S3)			3,640.000	SQYD
509-01-00100	Cold Planing Asphaltic Pavement			3,640.000	SQYD
509-02-00100	Contractor Retained Reclaimed Asphaltic Pavement			6,067.000	SQYD
706-03-00300	Incidental Concrete Paving (6" Thick)			-169.000	CUYD
707-01-00200	Concrete Curb (Barrier)			352.500	SQYD
713-01-00100	Temporary Signs and Barricades			861.100	LNFT
713-03-01000	Temporary Pavement Markings (Broken Line) (4" Width) (4' Length)			0.150	LUMP
713-04-01000	Temporary Pavement Markings (Solid Line) (4" Width)			0.776	MILE
713-06-00200	Temporary ReflectORIZED Raised Pavement Markers (Tabs)			1.551	MILE
				69.000	EACH
727-01-00100	Mobilization				
731-02-00100	ReflectORIZED Raised Pavement Markers			0.150	LUMP
732-02-01000	Plastic Pavement Striping (Solid Line) (4" Width) (Thermoplastic 40 mil)			35.000	EACH
				0.517	MILE

Notes:

See bottom of proposal summary pages for applicable revision notes.



7/8/2009

Summary Of Estimated Quantities

Page: 18

Project ID: 026-03-0042 State Project Number: 026-03-0042

Federal Project Number: 1508(500)

Project Description: US 65 - FOULES (NORTHBOUND)

Item No.	Description	Supplemental Description	Alternate Set Member	Quantity	Units
732-03-01000	Plastic Pavement Striping (Broken Line) (4" Width) (Thermoplastic 40 mil)			0.259	MILE
740-01-00100	Construction Layout				
806-01-00100	Deformed Reinforcing Steel			0.150	LUMP
NS-737-00001	Traffic Paint Curbs and Traffic Islands			798.000	LB
				352.500	SQYD

() Item will be bid as lump sum

Notes:

See bottom of proposal summary pages for applicable revision notes.



7/8/2009

Summary Of Estimated Quantities

Page: 18a

Project ID: 026-04-0029 State Project Number: 026-04-0029
Federal Project Number: 1508(500)
Project Description: US 65 - FOULES (NORTHBOUND)

Item No.	Description	Supplemental Description	Alternate Set Member	Quantity	Units
General Items					
202-01-00100	Removal of Structures and Obstructions			1.000	LUMP
203-07-00100	Borrow (Vehicular Measurement)			338.000	CUYD
401-02-00100	Aggregate Surface Course (Adjusted Vehicular Measurement)			142.000	CUYD
502-01-00100	Superpave Asphaltic Concrete			10,962.300	TON
502-01-00200	Superpave Asphaltic Concrete, Drives, Turnouts and Miscellaneous			163.400	TON
507-01-00100	Asphaltic Material (CRS-2P Emulsion)			84,065.000	GAL
507-02-00200	Aggregate (S2)			92,013.000	SQYD
507-02-00300	Aggregate (S3)			161,347.000	SQYD
509-01-00100	Cold Planing Asphaltic Pavement			92,297.000	SQYD
509-02-00100	Contractor Retained Reclaimed Asphaltic Pavement			-2,564.000	CUYD
701-10-01100	Reinforced Concrete Pipe (Extension) (36")			32.000	LNFT
701-15-00100	Concrete Collar			2.000	EACH
713-01-00100	Temporary Signs and Barricades			0.850	LUMP
713-03-01000	Temporary Pavement Markings (Broken Line) (4" Width) (4' Length)			19.991	MILE
713-04-01000	Temporary Pavement Markings (Solid Line) (4" Width)			39.983	MILE
713-06-00200	Temporary ReflectORIZED Raised Pavement Markers (Tabs)			1,760.000	EACH
716-01-00100	Mulch (Vegetative)			0.200	TON

Notes:

See bottom of proposal summary pages for applicable revision notes.



7/8/2009

Summary Of Estimated Quantities

Page: 18b

Project ID: 026-04-0029 State Project Number: 026-04-0029
Federal Project Number: 1508(500)
Project Description: US 65 - FOULES (NORTHBOUND)

Item No.	Description	Supplemental Description	Alternate Set Member	Quantity	Units
717-01-00100	Seeding			10.000	LB
718-01-00100	Fertilizer			170.000	LB
726-01-00100	Bedding Material			16.500	CUYD
727-01-00100	Mobilization			0.850	LUMP
731-02-00100	Recolorized Raised Pavement Markers			881.000	EACH
732-01-01040	Plastic Pavement Striping (8" Width) (Thermoplastic 90 mil)			600.000	LNFT
732-02-01000	Plastic Pavement Striping (Solid Line) (4" Width) (Thermoplastic 40 mil)			13.328	MILE
732-03-01000	Plastic Pavement Striping (Broken Line) (4" Width) (Thermoplastic 40 mil)			6.664	MILE
735-01-00100	Mailboxes			16.000	EACH
735-02-00100	Mailbox Supports (Single)			13.000	EACH
735-04-00100	Mailbox Supports (Multiple)			1.000	EACH
740-01-00100	Construction Layout			0.850	LUMP
NS-500-00200	Rumble Strips (Ground-In)			0.379	MILE

() Item will be bid as lump sum

Notes:

See bottom of proposal summary pages for applicable revision notes.



7/8/2009

Master Summary Of Estimated Quantities

Page: 18c

Proposal ID: 026-03-0042 State Project Number: 026-03-0042
Federal Project Number: ARR-1508(500)
Proposal Description: US 65 - FOULES (NORTHBOUND)

Item No.	Description	Supplemental Description	Alternate Set Member	Quantity	Units
General Items					
202-01-00100	Removal of Structures and Obstructions			1,000	LUMP
203-07-00100	Borrow (Vehicular Measurement)			338,000	CUYD
401-02-00100	Aggregate Surface Course (Adjusted Vehicular Measurement)			223,000	CUYD
502-01-00100	Superpave Asphaltic Concrete			11,629,600	TON
502-01-00200	Superpave Asphaltic Concrete, Drives, Turnouts and Miscellaneous			305,500	TON
507-01-00100	Asphaltic Material (CRS-2P Emulsion)			86,540,000	GAL
507-02-00200	Aggregate (S2)			95,653,000	SQYD
507-02-00300	Aggregate (S3)			164,987,000	SQYD
509-01-00100	Cold Planing Asphaltic Pavement			98,364,000	SQYD
509-02-00100	Contractor Retained Reclaimed Asphaltic Pavement			-2,733,000	CUYD
701-10-01100	Reinforced Concrete Pipe (Extension) (36")			32,000	LNFT
701-15-00100	Concrete Collar			2,000	EACH
706-03-00300	Incidental Concrete Paving (6" Thick)			352,500	SQYD
707-01-00200	Concrete Curb (Barrier)			861,100	LNFT
713-01-00100	Temporary Signs and Barricades			1,000	LUMP

Notes:

Rev. 1 - 07/8/2009 - Added Item



Master

7/8/2009

Summary Of Estimated Quantities

Page: 18d

Proposal ID: 026-03-0042 State Project Number: 026-03-0042
Federal Project Number: ARR-1508(500)
Proposal Description: US 65 - FOULES (NORTHBOUND)

Item No.	Description	Supplemental Description	Alternate Set Member	Quantity	Units
713-03-01000	Temporary Pavement Markings (Broken Line) (4" Width) (4' Length)			20.767	MILE
713-04-01000	Temporary Pavement Markings (Solid Line) (4" Width)			41.534	MILE
713-06-00200	Temporary ReflectORIZED Raised Pavement Markers (Tabs)			1,829.000	EACH
716-01-00100	Mulch (Vegetative)			0.200	TON
717-01-00100	Seeding			10.000	LB
718-01-00100	Fertilizer			170.000	LB
726-01-00100	Bedding Material			16.500	CUYD
727-01-00100	Mobilization			1.000	LUMP
731-02-00100	ReflectORIZED Raised Pavement Markers			916.000	EACH
732-01-01040	Plastic Pavement Striping (8" Width) (Thermoplastic 90 mil)			600.000	LNFT
732-02-01000	Plastic Pavement Striping (Solid Line) (4" Width) (Thermoplastic 40 mil)			13.845	MILE
732-03-01000	Plastic Pavement Striping (Broken Line) (4" Width) (Thermoplastic 40 mil)			6.923	MILE
735-01-00100	Mailboxes			16.000	EACH
735-02-00100	Mailbox Supports (Single)			13.000	EACH

Notes:

Rev. 1 - 07/8/2009 - Added Item



7/8/2009

Master Summary Of Estimated Quantities

Page: 182

Proposal ID: 026-03-0042 State Project Number: 026-03-0042

Federal Project Number: ARR-1508(500)

Proposal Description: US 65 - FOULES (NORTHBOUND)

Item No.	Description	Supplemental Description	Alternate Set Member	Quantity	Units
735-04-00100	Mailbox Supports (Multiple)			1.000	EACH
740-01-00100	Construction Layout			1.000	LUMP
806-01-00100	Deformed Reinforcing Steel			798.000	LB
NS-500-00200	Rumble Strips (Ground-In)			0.379	MILE
NS-737-00001	Traffic Paint Curbs and Traffic Islands			352.500	SQYD

Notes:

Rev. 1 - 07/8/2009 - Added Item



7/8/2009

Louisiana Department of Transportation and Development

Proposal Schedule of Items

Page: 5

Contract ID: 026-03-0042

Project(s): 026-03-0042, 026-04-0029

SECTION: 1

General Items

Proposal Line Number	Item ID	Description Unit Price (In Words, Ink or Typed)	Approximate Quantity	Unit of Measure
0033	NS-500-00200	Rumble Strips (Ground-In)	0.379	MILE
				Dollars
				Cents
0034	NS-737-00001	Traffic Paint Curbs and Traffic Islands	352.500	SQYD
				Dollars
				Cents

Section: 1

Total: _____

Total Bid: _____