

STATE OF LOUISIANA DEPARTMENT OF TRANSPORTATION AND DEVELOPMENT

P.O. Box 94245

Baton Rouge, Louisiana 70804-9245

www.dotd.la.gov (225) 379-1947



July 16, 2008

STATE PROJECT NOS. 450-34-0094 & 704-36-0083 I-610 FENCE REPAIRS (WEST END BLVD. TO ORLEANS AVE.) ROUTE I-610 ORLEANS PARISH

SUBJECT: ADDENDUM NO. 1

Gentlemen:

Attached are the construction proposal revisions dated July 16, 2008, on the captioned project for which bids will be received on July 30, 2008.

The following changes have been made:

- 1. Revised Item S-002, Fence Painting. (1 page)
- 2. Revised sheets 1 and 3 of the plans. (2 pages)

Please note these revisions in the proposal previously furnished you and bid accordingly.

Very truly yours,

William D. Drake Jr., P.E. Road Maintenance Engineer

Attachments

pc: Mr. Michael Stack

Mr. John Guidrey

Mr. John Monzon

Ms. Margaret Thompson

Mr. Masood Rasoulian

AN EQUAL OPPORTUNITY EMPLOYER A DRUG-FREE WORKPLACE 02 53 2010 ITEM S-002, FENCE PAINTING: This item shall consist of furnishing and applying a pigmented Exterior Latex Coating (ELC) over a composite wood fence. The ELC shall be the Duration® coating manufactured by Sherwin Williams or approved equal and shall be applied in accordance with the manufacturer's recommendations, the plans and specifications with a minimum of two coats. The coating shall have the ability to adhere to the composite wood fence bearing physical properties outlined in item S-001.


The ELC shall be a permanent coating. Prior to beginning of work contractor shall submit paint characteristics and proposed pigment color to the project engineer for

approval.

The finish for any area shall be completed in the same day and the limits of a finished area shall be made at natural breaks in the finished fence. All adjacent private property including vegetation and other objects shall be protected from overspray.

Payment will be made under:

Item S-002, Fence Painting, per square foot.

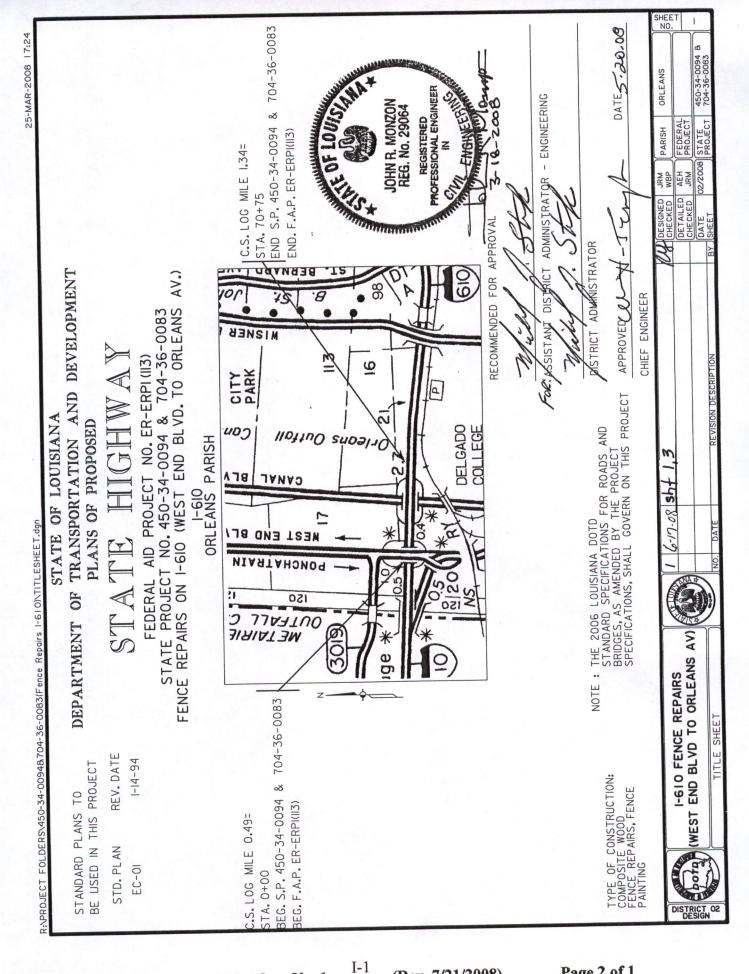

S. P. # 450-34-0094...

Addendum No. 1

(Rev. 7/21/2008)

Page 2 of 1

	SUMMARY OF ESTIM	ESTIMATED	QUANTITIES	ES		
				QUANTITIES	IES	
ITEM	DESCRIPTION	LINO	S.P. 450-34-0094	S.P. 704-36-0083	0083	TOTAL
713-01	TEMPORARY SIGNS AND BARRICADES	LUMP SUM	0.40	09.0		LUMP
727-01	MOBILIZATION	LUMP SUM	0.40	09.0		LUMP
740-01	CONSTRUCTION LAYOUT	LUMP SUM	0.40	09.0		LUMP
100-S	COMPOSITE WOOD FENCE REPAIRS	LIN. FT.	009	006		1500
S-002	FENCE PAINTING	SQ. FT.	58280 ①	87420	0	145700 🛈
				*		
	1-610 FENCE REPAIRS TANKS TO DECIMAL.		S-002 QUANTITY JRA	JRM DESIGNED JRM CHECKED WBP DETAILED AEH	WBP PARISH OF THE PEDERAL PEDERAL	ORLEANS ON TABLE
IWEST	WEST END BLYD 10 OKLEANS AVIET			DATE 02/2008	STATE	450-34-0094 B 704-36-0083

S. P. # 450-34-0094...

Addendum No. 1

I-8 (Rev. 7/21/2008)

Page 3 of 1