



BOBBY JINDAL
GOVERNOR

STATE OF LOUISIANA
DEPARTMENT OF TRANSPORTATION AND DEVELOPMENT

P.O. Box 94245
Baton Rouge, Louisiana 70804-9245

www.dotd.la.gov
225-379-1485



WILLIAM D. ANKNER, Ph.D.
SECRETARY

June 4, 2009

STATE PROJECT NO. 861-18-0005
JCT. LA 620 – JCT. LA 413
ROUTE LA 3091
WEST BATON ROUGE PARISH

SUBJECT: ADDENDUM NO. 1 (CONSTRUCTION PROPOSAL REVISION)
ELECTRONIC BIDDING AMENDMENT NO. 1

Gentlemen:

The following proposal revisions dated 06/2/09 on the captioned project for which bids will be received on Wednesday, June 24, 2009 have been posted on <http://www.dotd.la.gov/cgi-bin/construction.asp>.

1. Plan Revision No. 1. (5 pages)
2. Revised the Schedule of Items as follows: (5 pages)
 - a. Revised the quantities for items 509-02-00100, 713-03-02000 and 713-04-01000.
 - b. Added Item 701-14-00100.
 - c. Deleted supplemental description for Item NS-600-00220.

Please note these revisions in the proposal and bid accordingly. Mandatory electronic bidding is required for this project, and electronic bids and electronic bid bonds must be submitted via www.bidx.com for this letting date.

Sincerely,


RANDAL D. SANDERS, P. E.
CONTRACTS & SPECIFICATIONS ENGINEER

Attachments

cc: Mr. Brian Buckel
Mr. Roy Schmidt
Mr. Keith Palermo
Ms. Anna Hanks
Mr. Masood Rasoulain

STATE OF LOUISIANA
DEPARTMENT OF TRANSPORTATION & DEVELOPMENT
PLANS OF PROPOSED
STATE HIGHWAY

STATE PROJECT NO. 861-18-0005
JCT. LA 620 - JCT. LA 413
WEST BATON ROUGE PARISH
LA 3091

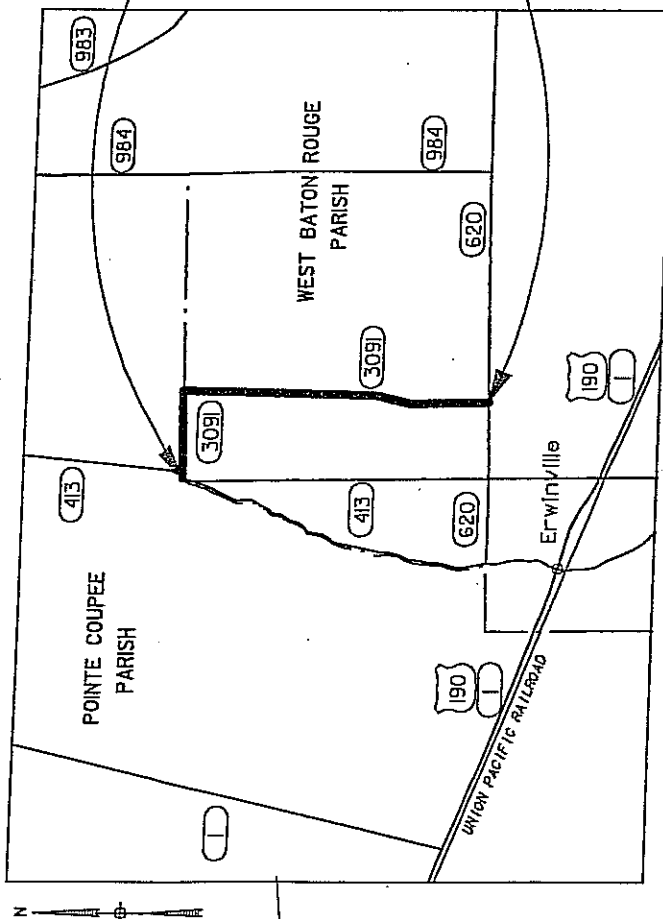

STATE OF LOUISIANA ★
MICHAEL GAR LOK NG
License No. 30732
PROFESSIONAL ENGINEER
IN

TRAFFIC DATA

2008 A.D.T. = 1,700
2018 A.D.T. = 1,900
D = 55%
K = 10%
T = 5%

RECOMMENDED FOR APPROVAL

SCHEDULE OF REVISIONS

[illegible]

RECOMMENDATION	DATE
THE 2006 LOUISIANA D.O.T.D. STANDARD SPECIFICATIONS FOR ROADS AND BRIDGES, AS AMENDED BY THE PROJECT SPECIFICATIONS, SHALL GOVERN ON THIS PROJECT.	

TYPE OF CONSTRUCTION: BASE COURSE; COLD PLANING, AND SUPERPAVE ASPHALTIC CONCRETE OVERLAY

PROGRAM DELIVERY / DESIGN ENGINEER

DISTRICT ADMINISTRATOR

CHIEF ENGINEER

DATE 3-30-09

PROJECT NOTES

STATE PROJECT NO.	PARISH	SHEET NO.
861-18-0005	W.B.R	3

- 1) Reclaimed Asphaltic Pavement (RAP) material generated shall be distributed as follows:
Parish Portion: Contractor shall haul and stockpile 10% of the RAP material generated (266 Cubic Yards Vehicular Measurement*) to West Baton Rouge
Contractor Portion: Contractor shall retain 45% of the RAP material generated (1196 Cubic Yards Vehicular Measurement*).
LADOTD Portion: Contractor shall haul and stockpile 45% of the RAP material generated (1195 Cubic Yards Vehicular Measurement*) to the LADOTD West
Baton Rouge Maintenance Yard located at 553-A Lobdell Highway, LA 415, Port Allen, LA 70767.
- * Vehicular Measurement of Rap material includes 1.65 swell factor.
- 2) ITEM 304-01-00100, LIME AND ITEM 304-03-00400, LIME TREATMENT (TYPE C)(12" THICK):
These items are for base treatment and are based on an estimated 2.5% of the stabilization area. Actual usage will be as needed based on determinations by the District Laboratory and the Project Engineer. The Project Engineer may direct any treatment he deems necessary. Cost of all manipulation of materials shall be included in the bid price of this item. Lime usage has been estimated at 6% by volume. Actual usage shall be as determined by D.O.T.D TR 416.
- ITEM 304-05-00100, LIME TREATMENT (TYPE E)(12" THICK):
These items are for subbase treatment and are based on an estimated 5% of the stabilization area. Actual usage will be as needed based on determinations by the District Laboratory and the Project Engineer. The Project Engineer may direct any treatment he deems necessary. The existing base material will be bladed aside or otherwise removed from the roadway. The subbase will then be treated as per specifications with lime and the base material returned to the roadway. All cost of manipulation of material shall be included in the bid price of this item. Lime usage has been estimated at 9% by volume. Actual usage shall be as determined by D.O.T.D TR 416.
- 3) ITEM 203-07-00200, BORROW (VEHICULAR MEASUREMENT)(SELECTED SOILS):
This item is to be used where cutting soil cement and for superelevation adjustment as directed by the Project Engineer.
- 4) ITEM 202-02-06100, REMOVAL OF CONCRETE WALKS AND DRIVES:
ITEM NS-600-00220, SAW CUTTING PORTLAND CEMENT CONCRETE PAVEMENT (SAW CUTTING DRIVEWAYS (6" DEEP)):
Prior to removal of existing concrete walks and drives, saw cuts shall be made with a concrete saw for the full depth of the concrete on the line between the concrete to be removed and the concrete to remain as marked by the project engineer. Saw cutting to be paid under item NS-600-00220, SAW CUTTING PORTLAND CEMENT CONCRETE PAVEMENT (SAW CUTTING DRIVEWAYS (6" DEEP)).
- 5) The contractor is responsible for notifying Louisiana One Call, city, parish, LADOTD Utility Section @ 225-231-4129 as well as any local government to assist in locating utility lines prior to doing any excavation. The contractor shall be responsible for determining the exact location of utility lines. If necessary, the utility lines shall be exposed by the contractor. The cost of exposing utility lines shall be included in pay item 740-01-00100, Construction Layout.
- 6) Item NS-200-00020, CLEANING EXISTING DITCHES
This item shall be used at each cross drain location and other locations as directed by the project engineer.

06/03/2009	REVISED NOTES	MN
DATE	REVISION	BY

Summary Of Estimated Quantities

Page: 9

Proposal ID: 861-18-0005

State Project Number: 861-18-0005

Federal Project Number:

Proposal Description: Jct. LA 620 - Jct. LA 413

Item No.	Description	Supplemental Description		Alternate Set Member	Quantity	Units
		General Items				
202-02-06100	Removal of Concrete Walks and Drives					
203-07-00100	Borrow (Vehicular Measurement)				650.000	SQYD
203-07-00200	Borrow (Vehicular Measurement) (Selected Soils)				2,898.000	CUYD
204-05-00100	Temporary Sediment Check Dams (Hay)				927.000	CUYD
204-06-00100	Temporary Silt Fencing				20.000	EACH
304-01-00100	Lime				3,260.000	LNFT
304-03-00400	Lime Treatment (Type C) (12" Thick)				23.590	TON
304-05-00100	Lime Treatment (Type E)		12" THICK		833.000	SQYD
308-01-00100	In-Place Cement Treated Base Course (12" Thick)				23.620	TON
311-02-00100	Aggregate Surface Course (Adjusted Vehicular Measurement)				33,329.000	SQYD
312-01-00100	Superpave Asphaltic Concrete				1,577.000	CUYD
312-01-00200	Superpave Asphaltic Concrete, Drives, Turnouts and Miscellaneous				6,136.800	TON
319-01-00100	Cold Planing Asphaltic Pavement				1,352.500	TON
319-02-00100	Contractor Retained Reclaimed Asphaltic Pavement				28,981.000	SQYD
313-01-00100	Temporary Signs and Barricades				-726.000	CUYD
Notes:					1.000	LUMP

8-0005

Amendment No. 1

Page 33 of 10

Rev. 1 - 6/3/2009 - General Revision

Rev. 1 - 6/3/2009 - General Revision



6/4/2009

Summary Of Estimated Quantities

Page: 10

Proposal ID: 861-18-0005 State Project Number: 861-18-0005

Federal Project Number:

Proposal Description: Jct. LA 620 - Jct. LA 413

Item No.	Description	Supplemental Description	Alternate Set Member	Quantity	Units
713-02-00500	Temporary Pavement Markings (24" Width)			48.000	LNFT
713-03-01000	Temporary Pavement Markings (Broken Line) (4" Width) (4' Length)			7.410	MILE
713-03-02000	Temporary Pavement Markings (Broken Line) (4" Width) (10' Length)			7.410	MILE
713-04-01000	Temporary Pavement Markings (Solid Line) (4" Width)			7.410	MILE
722-02-00100	Project Site Laboratory (Equipped)			7.410	MILE
727-01-00100	Mobilization			1.000	EACH
729-16-00200	Object Marker Assembly (Type 2)			1.000	LUMP
731-02-00100	Reflectorized Raised Pavement Markers			52.000	EACH
732-01-02060	Plastic Pavement Striping (24" Width) (Thermoplastic 125 mil)			327.000	EACH
732-02-02000	Plastic Pavement Striping (Solid Line) (4" Width) (Thermoplastic 90 mil)			48.000	LNFT
732-03-02000	Plastic Pavement Striping (Broken Line) (4" Width) (Thermoplastic 90 mil)			6.180	MILE
735-01-00100	Mailboxes			2.370	MILE
735-02-00100	Mailbox Supports (Single)			101.000	EACH
735-03-00100	Mailbox Supports (Double)			89.000	EACH
				4.000	EACH

Notes:

Rev. 1 - 6/3/2009 - General Revision

Summary Of Estimated Quantities

Page: 10a

State Project Number: 861-18-0005

Proposal ID: 861-18-0005

Federal Project Number:

Proposal Description: Jct. LA 620 - Jct. LA 413

Item No.	Description	Supplemental Description	Alternate Set Member	Quantity	Units
735-04-00100	Mailbox Supports (Multiple)			1,000	EACH
739-01-00100	Hydro-Seeding			3,000	ACRE
740-01-00100	Construction Layout			1,000	LUMP
MS-200-00020	Cleaning Existing Ditches			3,000,000	LNFT
MS-600-00220	Saw Cutting Portland Cement Concrete Pavement			6,600,000	LNLF
701-14-00100	Cleaning Existing Pipes			300,000	LNFT

Amendment No. 1

(Rev. 06/04/09) Pages 5 of 10

Notes:

Rev. 1 - 6/3/2009 - General Revision



6/4/2009

Louisiana Department of Transportation and Development

Proposal Schedule of Items

Page: 1

Contract ID: 861-18-0005

Project(s): 861-18-0005

SECTION: 1

General Items

Proposal Line Number	Item ID	Description Unit Price (In Words, Ink or Typed)	Approximate Quantity	Unit of Measure
0001	202-02-06100	Removal of Concrete Walks and Drives	650.000	SQYD
				Dollars
				Cents
0002	203-07-00100	Borrow (Vehicular Measurement)	2,898.000	CUYD
				Dollars
				Cents
0003	203-07-00200	Borrow (Vehicular Measurement) (Selected Soils)	927.000	CUYD
				Dollars
				Cents
0004	204-06-00100	Temporary Sediment Check Dams (Hay)	20.000	EACH
				Dollars
				Cents
0005	204-06-00100	Temporary Silt Fencing	3,260.000	LNFT
				Dollars
				Cents
0006	304-01-00100	Lime	23.590	TON
				Dollars
				Cents
0007	304-03-00400	Lime Treatment (Type C) (12" Thick)	833.000	SQYD
				Dollars
				Cents
0008	304-05-00100	Lime Treatment (Type E) 12" THICK	23.620	TON
				Dollars
				Cents



6/4/2009

Louisiana Department of Transportation and Development

Proposal Schedule of Items

Page: 2

Contract ID: 861-18-0005

Project(s): 861-18-0005

SECTION: 1

General Items

Proposal Line Number	Item ID	Description (Unit Price (In Words, Ink on Typed))	Approximate Quantity	Unit of Measure
0009	308-01-00100	In-Place Cement Treated Base Course (12" Thick)	33,329.000	SQYD
				Dollars
				Cents
0010	401-02-00100	Aggregate Surface Course (Adjusted Vehicular Measurement)	1,577.000	CUYD
				Dollars
				Cents
0011	502-01-00100	Superpave Asphaltic Concrete	6,136.800	TON
				Dollars
				Cents
0012	502-01-00200	Superpave Asphaltic Concrete, Drives, Turnouts and Miscellaneous	1,352.500	TON
				Dollars
				Cents
0013	509-01-00100	Cold Planing Asphaltic Pavement	28,981.000	SQYD
				Dollars
				Cents
0014	509-02-00100	Contractor Retained Reclaimed Asphaltic Pavement	725.000	CUYD
				Dollars
				Cents
0015	713-01-00100	Temporary Signs and Barricades		LUMP SUM
				Dollars
				Cents
0016	713-02-00500	Temporary Pavement Markings (24" Width)	48.000	LNFT
				Dollars
				Cents



6/4/2009

Louisiana Department of Transportation and Development

Proposal Schedule of Items

Page: 3

Contract ID: 861-18-0005

Project(s): 861-18-0005

SECTION: 1

General Items

Proposal Line Number	Item ID	Description Unit Price (In Words, Ink or Typed)	Approximate Quantity	Unit or Measure
0017	713-03-01000	Temporary Pavement Markings (Broken Line) (4" Width) (4' Length)	7.410	MILE
				Dollars
				Cents
0018	713-03-02000	Temporary Pavement Markings (Broken Line) (4" Width) (10' Length)	7.410	MILE
				Dollars
				Cents
0019	713-04-01000	Temporary Pavement Markings (Solid Line) (4" Width)	7.410	MILE
				Dollars
				Cents
0020	722-02-00100	Project Site Laboratory (Equipped)	1.0000	EACH
				Dollars
				Cents
0021	727-01-00100	Mobilization		LUMP SUM
				Dollars
				Cents
0022	729-16-00200	Object Marker Assembly (Type 2)	52.000	EACH
				Dollars
				Cents
0023	731-02-00100	Reflectorized Raised Pavement Markers	327.000	EACH
				Dollars
				Cents
0024	732-01-02080	Plastic Pavement Striping (24" Width) (Thermoplastic 125 mil)	48.000	LNFT
				Dollars
				Cents



6/4/2009

Louisiana Department of Transportation and Development

Proposal Schedule of Items

Page: 4

Contract ID: 861-18-0005

Project(s): 861-18-0005

SECTION: 1

General Items

Proposal Line Number	Item ID	Description Unit Price (In Words, Ink or Typed)	Approximate Quantity	Unit of Measure
0025	732-02-02000	Plastic Pavement Striping (Solid Line) (4" Width) (Thermoplastic 90 mil)	6.180	MILE
				Dollars
				Cents
0026	732-03-02000	Plastic Pavement Striping (Broken Line) (4" Width) (Thermoplastic 90 mil)	2.370	MILE
				Dollars
				Cents
0027	735-01-00100	Mailboxes	101.000	EACH
				Dollars
				Cents
0028	735-02-00100	Mailbox Supports (Single)	89.000	EACH
				Dollars
				Cents
0029	735-03-00100	Mailbox Supports (Double)	4.000	EACH
				Dollars
				Cents
0030	735-04-00100	Mailbox Supports (Multiple)	1.000	EACH
				Dollars
				Cents
0031	739-01-00100	Hydro-Seeding	3.000	ACRE
				Dollars
				Cents
0032	740-01-00100	Construction Layout		LUMP SUM
				Dollars
				Cents



6/4/2009

Louisiana Department of Transportation and Development

Proposal Schedule of Items

Page: 5

Contract ID: 861-18-0005

Project(s): 861-18-0005

SECTION: 1

General Items

Proposal Line Number	Item ID	Description Unit Price (In Words-Ink or Typed)	Approximate Quantity	Unit of Measure
0033	NS-200-00020	Cleaning Existing Ditches	3,000.000	LNFT
				Dollars
				Cents
0034	NS-600-00220	Saw Cutting Portland Cement Concrete Pavement	6,600.000	LNLF
				Dollars
				Cents
0035	701-14-00100	Cleaning Existing Pipes	300.000	LNFT
				Dollars
				Cents

Section: 1

Total:

Total Bid: